


Backing Types for WATERHOG Mats




SBR Rubber, .078 mil. thickness, cleated

Cleated backing recommended for carpeted floors.

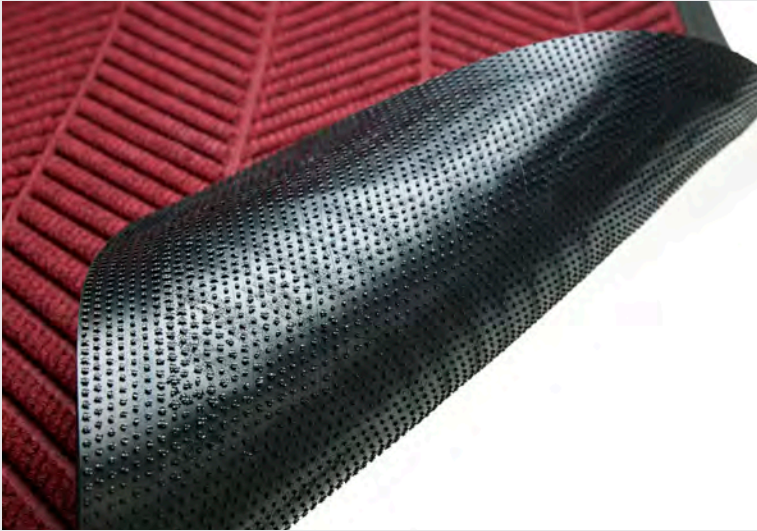

SBR Rubber, .078 mil. thickness, smooth

Smooth backing recommended for typical hard floor surface applications.

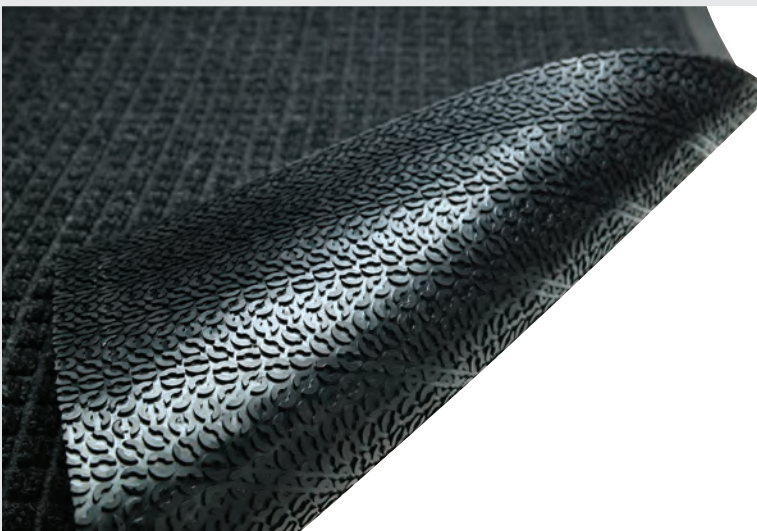

Nitrile Rubber, .100 mil. thickness

ANCHOR SAFE backing, recommended for maximum movement control on hard surfaces. The right choice for problem areas, including areas with high cart and pedestrian traffic.